

EUROTROL®
WATER TREATMENT COMPONENTS



Residential R.O.
components



In-Line Cartridges

- IN LINE cartridges 1/4" NPT F connections;
- Max pressure = 100 psi (7 bar);
- Max temperature = 35°C;



Ref	Description	Fam.	Subfam.		
DE028	IN LINE ACTIVATED CARBON CARTRIDGE 10" x 2"	30	175		
DE029	IN-LINE SEDIMENT CARTRIDGE 10" x 2"	30	175		

Ref	Diameter (inch)	Length (inch)	Version	Flow (gpm)
DE028	2"	10"	Coconut Shell Activated Carbon	0,75
DE029	2"	10"	Sediment	0,75

Box: WxLxH	Box: Q.ty	Box: Weight	Pallet: WxLxH	Pallet: Q.ty	Pallet: Weight

Certificates	Manufacturer	Sectors
DM174-2004	MWG	Domestic

Ref	Description	Fam.	Subfam.		
DE030	IN-LINE ACTIVATED CARBON CARTRIDGE 11" x 2.1/2"	30	175		
DE031	IN-LINE SEDIMENT CARTRIDGE 11" x 2.1/2"	30	175		

Ref	Diameter (inch)	Length (inch)	Version	Flow (gpm)
DE030	2½"	11"	Coconut Shell Activated Carbon	0,75
DE031	2½"	11"	Sediment	1,00

Box: WxLxH	Box: Q.ty	Box: Weight	Pallet: WxLxH	Pallet: Q.ty	Pallet: Weight

Certificates	Manufacturer	Sectors
DM174-2004	MWG	Domestic



Clips - Valves - Tubing

Single Mounting Clips: PP material - white colour.

Ref	Description	Fam.	Subfam.		
DE033	SINGLE CLIP 2"	30	175		
DE034	SINGLE CLIP 2.5"	30	175		
DE006	SINGLE CLIP 3"	30	175		

Ref	Description	Diameter (mm)
DE033	SINGLE CLIP 2"	50
DE034	SINGLE CLIP 2.5"	60
DE006	SINGLE CLIP 3"	90

Certificates	Manufacturer	Sectors
		Domestic

Double Mounting Clips: PP material - white colour

Ref	Description	Fam.	Subfam.		
DE035	DOUBLE CLIPS 2" x 2.5"	30	175		
DE036	DOUBLE CLIPS 2.1/2"x2.1/2"	30	175		

Ref	Description	Diameter (mm)
DE035	DOUBLE CLIPS 2" x 2.5"	50 x 60
DE036	DOUBLE CLIPS 2.1/2"x2.1/2"	60 x 60

Certificates	Manufacturer	Sectors
		Domestic



MWG High Pressure Switch

Pressure switch contact NO; Connection 1/4" G; Body material in Stainless Steel; Diaphragm in NBR; Max Voltage = 42 V; Max Current = 4 A; Max operating pressure = 150 bar; Operating temperature range = - 40 ÷ + 100°C Class protection IP54; Conform with CE safety Directives;

Ref	Description	Fam.	Subfam.		
DH571	MWG HIGH PRESSURE SWITCH 1-10 BAR	30	175		
DH573	MWG HIGH PRESSURE SWITCH 1-20 BAR	30	175		
DH575	MWG HIGH PRESSURE SWITCH 20-50 BAR	30	175		

Ref	Description	Tolerance
DH571	MWG HIGH PRESSURE SWITCH 1-10 BAR	± 0,5 bar
DH573	MWG HIGH PRESSURE SWITCH 1-20 BAR	± 1 bar
DH575	MWG HIGH PRESSURE SWITCH 20-50 BAR	± 2 bar

Box: WxLxH	Box: Q.ty	Box: Weight	Pallet: WxLxH	Pallet: Q.ty	Pallet: Weight

Certificates	Manufacturer	Sectors
DM174-2004 CE	MWG	Domestic, Commercial, Industrial

MWG Booster Pumps for Residential R.O.

- MWG booster pumps for residential R.O. Systems; Max operating Temperature = 40°C;
- Membrane booster pumps without transformer (to order separately);
- IN/OUT connections 3/8" F;



Ref	Description	Fam.	Subfam.		
DH501	BOOSTER PUMP M100G 1.1 LPM 24VDC 1.2A	30	175		
DH503	BOOSTER PUMP L200G 1.6 LPM 24VDC 1.6A	30	175		
DH505	BOOSTER PUMP L400G 2.6 LPM 24VDC 2.5A	30	175		

Ref	Ref Trasformatore	Inle pressure (psl)	Working pressure range (psl)	Flow 70 psi (l/min)	Rated current (A)	Current 70 psi (A)
DH501	DH531	30	60 ÷ 80	≥ 1,1	1,8	≤ 1,2
DH503	DH533	30	60 ÷ 80	≥ 1,6	2,2	≤ 1,6
DH505	DH535	30	70 ÷ 90	≥ 2,6	3,6	≤ 2,5

Box: WxLxH	Box: Q.ty	Box: Weight	Pallet: WxLxH	Pallet: Q.ty	Pallet: Weight

Certificates	Manufacturer	Sectors
DM174-2004 CE	MWG	Domestic

Transformer

Ref	Description	Fam.	Subfam.		
DH531	TRANSFORMER 24VDC 2A	30	175		
DH533	TRANSFORMER 24VDC 2.5A	30	175		
DH535	TRANSFORMER 24VDC 4A	30	175		

Box: WxLxH	Box: Q.ty	Box: Weight	Pallet: WxLxH	Pallet: Q.ty	Pallet: Weight

Certificates	Manufacturer	Sectors
CE		Domestic



MWG Two -Way Solenoid Valves for R.O. Systems



Two-way solenoid valve NC direct acting; Body material plastic; Seals in EPDM; Spring in SS304; Range water temperature = 4°C ÷ 120°C; Range ambient temperature = -10°C ÷ +40°C; Range pressure = 0 ÷ 8 bar; Class protection IP65; Connections 1/4" NPT; Orifice diameter 2,5 mm;

Ref	Description	Fam.	Subfa m.		
DH601	MWG PLASTIC SOLENOID VALVEC NC 1/4" NPT 24V DC	30	175		
DH603	MWG PLASTIC SOLENOID VALVEC NC 1/4" NPT 24V AC	30	175		

Ref	Description	Power supply
DH601	MWG PLASTIC SOLENOID VALVEC NC 1/4" NPT 24V DC	24 V DC
DH603	MWG PLASTIC SOLENOID VALVEC NC 1/4" NPT 24V AC	220 V AC

Certificates	Manufacturer	Sectors
DM174-2004 CE	MWG	Domestic



Two-way solenoid valve NC direct acting; Body material brass; Seals in EPDM; Range water temperature = 4°C ÷ 120°C; Class protection IP65; G thread connections;

Ref	Description	Fam.	Subfa m.		
DH611	MWG BRASS SOLENOID VALVEC NC 1/4" GAS 24V DC	30	175		
DH615	MWG BRASS SOLENOID VALVEC NC 3/8" GAS 220V AC 5 BAR	30	175		

Ref	Orifice diameter (mm)	Max operating pressure (bar)
DH611	5	5
DH615	5	5

Certificates	Manufacturer	Sectors
DM174-2004 CE	MWG	Domestic, Commercial, Industrial



Two-way solenoid valve NC indirect acting; Body material brass; Seals in EPDM; Range water temperature = 4°C ÷ 120°C; Class protection IP65; G thread connections;

Ref	Description	Fam.	Subfa m.		
DH621	MWG BRASS SOLENOID VALVE NC 3/8" GAS 220V AC 16 BAR	30	175		
DH623	MWG BRASS SOLENOID VALVE NC 1/2" GAS 220V AC	30	175		
DH625	MWG BRASS SOLENOID VALVE NC 3/4" GAS 220V AC	30	175		
DH627	MWG BRASS SOLENOID VALVE NC 1" GAS 220V AC	30	175		
DH629	MWG BRASS SOLENOID VALVE NC 1 1/4" GAS 220V AC	30	175		
DH631	MWG BRASS SOLENOID VALVE NC 1 1/2" GAS 220V AC	30	175		
DH633	MWG BRASS SOLENOID VALVE NC 2" GAS 220V AC	30	175		

Ref	Orifice diameter (mm)	Max operating pressure (bar)
DH621	15	16
DH623	15	16
DH625	20	16
DH627	25	16
DH629	35	16
DH631	35	16
DH633	50	16

Certificates	Manufacturer	Sectors
DM174-2004 CE	MWG	Domestic, Commercial, Industrial



Valves for Residential R.O. and Filtration System

Needle Valves

Needle valve for residential R.O and filtration systems; for tube 1/2" M/F or 3/8" M/F; connection for 1/4" or 3/8" or 5/16" flexible tubing; material brass.

Ref	Description	Fam.	Subfam.		
DE039	NEEDLE VALVE 1/2" MF X 1/4 TUBE	30	175		
DE050	NEEDLE VALVE 1/2" MF X 3/8 TUBE	30	175		
DE050A	NEEDLE VALVE 1/2" MF X 5/16" TUBE	30	175		
DE039A	NEEDLE VALVE 3/8" M/F x 1/4" TUBE	30	175		

Drain and Diverter Valves for R.O. Systems

Suitable for residential R.O and filtration systems.

Drain Clamp - material ABS black.

Ref	Description	Fam.	Subfam.		
DE040	DRAIN CLAMP 1/4" TUBE	30	175		
DE049	DRAIN CLAMP 1/4" FEMALE NPT	30	175		

Diverter Valve with Swivel Collar

Connection for 1/4" tubing; material chrome plated brass.

Ref	Description	Fam.	Subfam.		
DE042	DIVERter VALVE W/SWIVEL COLLAR 1/4" TUBE	30	175		

Adapter 15/16" - 27 X 55/64" - 27

Length 8 mm; material chrome plated brass.

Ref	Description	Fam.	Subfam.		
DE043	ADAPTER 15/16" x 55/64"	30	175		



Jaco Style Fittings

Jaco Style Fittings

Straight

Ref	Description	Fam.	Subfam.		
DE063	STRAIGHT FITTING 1/8"NPT x 1/4" TUBE	30	175		
DE064	STRAIGHT FITTING 1/4"NPT x 1/4" TUBE	30	175		
DE068	STRAIGHT FITTING 1/4" F NPT X1/4" TUBE	30	175		
DE069	STRAIGHT FITTING 3/8" NPT X1/4" TUBE	30	175		

Elbows

Ref	Description	Fam.	Subfam.		
DE060	ELBOW FITTING 1/8" NPT x 1/4" TUBE	30	175		
DE062	ELBOW FITTING 1/8" FNPT x 1/4" TUBE	30	175		
DE061	ELBOW FITTING 1/4" NPT x 1/4" TUBE	30	175		
DE070	ELBOW FITTING 3/8" NPT X 1/4" TUBE	30	175		

Tees

Ref	Description	Fam.	Subfam.		
DE065	TEES FITTING 1/4" NPT LATERAL X1/4" TUBE	30	175		
DE066	TEES FITTING 1/4" NPT CENTRAL X1/4" TUBE	30	175		
DE067	TEES FITTING 1/4" TUBE	30	175		





Valves for Residential R.O. and Filtration System

Saddle Valve

Saddle valve self piercing for residential R.O and filtration systems; suitable for copper piping; connection for 1/4" tubing; material brass with aluminium clamp.

Ref	Description	Fam.	Subfa m.		
DE041	NEEDLE VALVE 1/4" TUBE	30	175		

Flow Restrictors - Check Valves

In-Line Flow Restrictors

Quick connections 1/4" tube.

Ref	Description	Fam.	Subfa m.		
DE105	IN LINE FLOW RESTRICTOR 150 MLM - 1/4" TUBE	30	175		
DE106	IN LINE FLOW RESTRICTOR 300 MLM - 1/4" TUBE	30	175		
DE107	IN LINE FLOW RESTRICTOR 400 MLM - 1/4" TUBE	30	175		
DE108	IN LINE FLOW RESTRICTOR 550 MLM - 1/4" TUBE	30	175		
DE109	IN LINE FLOW RESTRICTOR 600 MLM - 1/4" TUBE	30	175		
DE110	IN LINE FLOW RESTRICTOR 800 MLM - 1/4" TUBE	30	175		

Ref	Flow 60 psi (gpd)	Flow 60 psi (ml/min)
DE105	60	150
DE106	115	300
DE107	150	400
DE108	208	550
DE109	227	600
DE110	300	800



JACO Style Check Valve

Jaco style elbow 1/8" x 1/4" tube complete with AISI check-valve.

Ref	Description	Fam.	Subfa m.		
DE079	ELBOW 1/8"X1/4" TUBE W/STAINLESS STEEL CHECK VALV	30	175		



S.S. Check Valve

Stainless steel check valve 1/8" x 1/8" ..

Ref	Description	Fam.	Subfa m.		
DE048	CHECK-VALVE S.S. 1/8" NPT	30	175		

Elbowed Ball Valve

Material white plastic; connections 1/4" F NPT x 1/4" tubing.

Ref	Description	Fam.	Subfa m.		
DE052	ELBOWED BALL VALVE 1/4" F NPTx1/4" TUBE	30	175		



Automatic Shut-Off Valve

Material white ABS; connections 1/4" tubing; max pressure 125 psi (8,5 bar).

Ref	Description	Fam.	Subfa m.		
DE038	SHUT-OFF VALVE 1/4" TUBE	30	175		



Mechanical Flow Meter

Adjustable setting; automatic shut-off based on volume; capacity 7000 litres; connections 1/4" NPT; operating pressure 1 ÷ 8,5 bar; material ABS, black colour.

Ref	Description	Fam.	Subfa m.		
DE080	MECHANICAL FLOW METER 1/4" NPT	30	175		





Storage Tanks for R.O. Systems

PP Storage Tanks

- Pressurized storage tank for treated water;
- White colour;
- Connection 1/4" NPT;
- Min. operating pressure 1 bar.

Ref	Description	Fam.	Subfam.		
DE032	PP/SS R.O STORAGE TANK 12 LT.	30	175		
DE051	PLASTIC R.O STORAGE TANK 16 LT.	30	175		

Ref	Diameter (mm)	Height (mm)	Max pressure (bar)
DE032	240	370	7,0
DE051	260	400	3,5

Box: WxLxH	Box: Q.ty	Box: Weight	Pallet: WxLxH	Pallet: Q.ty	Pallet: Weight

Certificates	Manufacturer	Sectors
NSF58 CE		Domestic

Steel Storage Tanks

- Pressurized storage tank for R.O water;
- Material painted steel, white colour;
- Connection 1" BSPF female;
- With threaded extension M 1" x 1/4", with elbowed ball valve with connection 3/8" tubing;
- Min. operating pressure 1 bar;
- Max operating pressure 7 bar.

Ref	Description	Fam.	Subfam.		
DE096	S.S. RO STORAGE TANK 41 LT.	30	175		
DE097	S.S. RO STORAGE TANK 75 LT.	30	175		

Ref	Diameter (mm)	Height (mm)
DE096	390	575
DE097	390	770

Box: WxLxH	Box: Q.ty	Box: Weight	Pallet: WxLxH	Pallet: Q.ty	Pallet: Weight

Certificates	Manufacturer	Sectors
NSF58 CE		Domestic

In-Line Cartridges

R.O. compact assembly and accessories

Ref	Description	Fam.	Subfam.		
DE100	R.O. COMPACT GROUP	30	175		
DE101	MEMBRANE 50 GPD FOR DE100	30	175		
DE102A	PREFILTER CARTRIDGE SEDIMENT/CARBON BLOCK FOR EMPTY COMPACT R.O. ASSEMBLY	30	175		
DE103	GAC POSTFILTER CARTRIDGE FOR EMPTY COMPACT R.O. ASSEMBLY	30	175		





Flexible 1/4" Tubing

Ref	Description	Fam.	Subfam.		
DE082	PVC TUBE WHITE 1/4" - ROLL 50 MT.	30	175		
DE083	PE TUBE BLUE 1/4" - ROLL 50 MT.	30	175		
DE084	PE TUBE BLACK 1/4" ROLL 50 MT.	30	175		
DE086	PE TUBE RED 1/4" - ROLL 50 MT.	30	175		
DE081	PE TUBE CLEAR 1/4" - ROLL 100 MT.	30	175		



Insert for Flexible 1/4" Tubing: CELCON material.


Ref	Description	Fam.	Subfam.		
DE059	PLASTIC INSERT FOR 1/4" TUBE	30	175		

Flow Restrictor Linear Type

- Capillary adjusting flow system with insertion in tube 1/4" diameter ($\varnothing e=6,35$ mm);
- 200 mm standard length; you can change the length as required (please see the diagram below);
- **WARNING:** it is essential that the cutting of the capillary be net and tube perfectly circular (you can use an awl in order to restore the circular form), otherwise the flow rate value can be greatly altered. Observe the flow direction as shown in Picture n.1.

Ref	Description	Fam.	Subfam.		
DE122	FLOW RESTRICTOR LINEAR TYPE - LG.200 MM	30	175		
DE124	FLOW RESTRICTOR FRT-14P INSERT	30	175		
DE125	CAPILLARY TUBE ROLL 25 MT	30	175		
DE123	FLOW RESTRICTOR JACO 1/4" UNION*	30	175		

ITEM	Ref	Description
1	DE122	FLOW RESTRICTOR LINEAR TYPE - LG.200 MM
2	DE124	FLOW RESTRICTOR FRT-14P INSERT
3	DE125	CAPILLARY TUBE ROLL 25 MT
4	DE123	FLOW RESTRICTOR JACO 1/4" UNION*





Faucet

Long Reach Faucet

- material chrome plated; connection for 1/4" tubing; complete with installation kit; threaded tube length 50 mm.

Ref	Description	Fam.	Subfa m.		
DE037	LONG REACH FAUCET 1/4" TUBE	30	175		

Certificates	Manufacturer	Sectors
		Domestic



Quarter-Turn faucet

- metal and plastic chrome material;
- connection for 1/4" tubing;
- complete with installation kit;
- threaded tube length 71 mm.

Ref	Description	Fam.	Subfa m.		
DE116	QUARTER - TURN FAUCET 1/4" TUBE	30	175		

Certificates	Manufacturer	Sectors
		Domestic



Single Handle Faucet with Drinking Nozzle

- monobloc, material chrome plated;
- adjustable necks;
- hot and cold water connections 1/2" with needle valves; treated water connection 1/4" tube;
- complete with installation kit.

Ref	Description	Fam.	Subfa m.		
DE087	SINGLE HEAD FAUCET W/DRINKING NOZZLE	30	175	175	

Certificates	Manufacturer	Sectors
		Domestic



Pressure Gauge - Adapters - Valves

Pressure Gauge

- pressure set 0 ÷ 10 bar;
- connection 1/8" M;
- diameter 25 mm.

Ref	Description	Fam.	Subfam.		
DE077	MANOMETER D.25 0-10 KG/CM2 1/8"	30	175		

Certificates	Manufacturer	Sectors
		Domestic

3 Ways Adapter for Pressure Gauge

- plastic material;
- connections 1/8" F x 1/8" M x 1/4" tube.

Ref	Description	Fam.	Subfam.		
DE078	3-WAYS FITTING FOR MANOMETER 1/8 F X 1/8 M X 1/4TUBO	30	175		


Certificates	Manufacturer	Sectors
		Domestic

High/low pressure switch

- Pressure 30 - 50 psi;
- Connections 1/4 tube;
- To use as high pressure switch contacts C and NC;
- To use as low pressure switch contacts C and NO.

Ref	Description	Fam.	Subfam.		
DE139	PRESSURE SWITCH PSH	30	175		

Certificates	Manufacturer	Sectors
		Domestic





Union connector

Ref	Description	Fam.	Subfa m.		
DH073	UNION CONNECTOR 1/4" - 1/4"	30	175		
DH075	UNION CONNECTOR 3/8" - 3/8"	30	175		
DH079	UNION CONNECTOR 3/8" - 1/4"	30	175		


Ref	B1 (mm)	B2 (mm)	Ø E (mm)	L (mm)
DH073	16,9	16,9	15,5	36,2
DH075	20,2	20,2	20,0	42,9
DH079	20,2	16,9	20,0	42,1



Union elbow

Ref	Description	Fam.	Subfa m.		
DH083	UNION ELBOW 1/4" - 1/4"	30	175		
DH085	UNION ELBOW 3/8" - 3/8"	30	175		


Ref	B1 (mm)	B2 (mm)	Ø E 1 (mm)	Ø E 2 (mm)	L (mm)	H (mm)
DH083	16,9	16,9	15,5	15,5	28,8	28,8
DH085	20,2	20,2	20,0	20,0	35,9	35,9



Union T

Ref	Description	Fam.	Subfa m.		
DH093	UNION TEE 1/4" - 1/4" - 1/4"	30	175		
DH095	UNION TEE 3/8" - 3/8" - 3/8"	30	175		

Ref	B1 (mm)	B2 (mm)	B3 (mm)	Ø E (mm)	L (mm)	H (mm)
DH093	16,9	16,9	16,9	15,5	42,0	28,8
DH095	20,2	20,2	20,2	20,0	51,8	35,9



Two way divider

Ref	Description	Fam.	Subfa m.		
DH103	TWO WAY DIVIDER 1/4" - 1/4" - 1/4"	30	175		
DH105	TWO WAY DIVIDER 3/8" - 3/8" - 3/8"	30	175		

Ref	B1 (mm)	B2 (mm)	Ø P1 (mm)	Ø P2 (mm)	L (mm)	J (mm)	C (mm)
DH103	16,9	16,9	15,5	15,5	38,8	15,5	3,3
DH105	20,2	20,2	20,0	20,0	46,4	20,0	4,5



Fittings

- Suitable for residential R.O. and filtration systems;
- Designed for water, food and air contact but can be used with selected gases, vacuum & other liquids;
- DM 174 (Italy) dated 06/04/2004 compliant about materials suitable for contact with water for human consumption;
- In compliance with the sanitary certification ACS (France);
- In acetal resin grey color, non-toxic and NSF approved material; Pressure max 16 bar @ 25°C.

Male connector NPT

Ref	Description	Fam.	Subfam.		
DH005	MALE CONNECTOR 1/8" NPT WITH D=1/4"	30	175		
DH006	MALE CONNECTOR 1/4" NPT WITH D=1/4"	30	175		
DH007	MALE CONNECTOR 3/8" NPT WITH D=1/4"	30	175		
DH012	MALE CONNECTOR 1/8" NPT WITH D=3/8"	30	175		
DH013	MALE CONNECTOR 1/4" NPT WITH D=3/8"	30	175		
DH014	MALE CONNECTOR 3/8" NPT WITH D=3/8"	30	175		

Ref	A (mm)	B (mm)	Ø E (mm)	H (mm)	L (mm)
DH005	9,1	16,9	17,8	15,8	27,0
DH006	13,2	16,9	17,8	15,8	27,0
DH007	13,8	16,9	21,4	19,0	26,1
DH012	9,1	20,2	23,0	20,6	30,4
DH013	13,2	20,2	23,0	20,6	34,3
DH014	13,8	20,2	23,0	20,6	29,9

Female adapter NPTF

Ref	Description	Fam.	Subfam.		
DH021	FEMALE ADAPTER 1/8" NPT WITH D=1/4"	30	175		
DH022	FEMALE ADAPTER 1/4" NPT WITH D=1/4"	30	175		
DH023	FEMALE ADAPTER 1/4" NPT WITH D=3/8"	30	175		

Ref	Ø P (mm)	A (mm)	B (mm)	Ø E (mm)	H (mm)	L (mm)
DH021	15,5	11,5	16,9	19,0	17	30,9
DH022	15,5	11,5	16,9	21,5	19	30,9
DH023	20,0	11,5	20,2	21,5	19	34,2

Male elbow NPT


Ref	Description	Fam.	Subfam.		
DH033	MALE ELBOW 1/8" NPT WITH D=1/4"	30	175		
DH034	MALE ELBOW 1/4" NPT WITH D=1/4"	30	175		
DH035	MALE ELBOW 3/8" NPT WITH D=1/4"	30	175		
DH038	MALE ELBOW 1/4" NPT WITH D=3/8"	30	175		
DH039	MALE ELBOW 3/8" NPT WITH D=3/8"	30	175		

Ref	Ø P (mm)	A (mm)	B (mm)	E (mm)	H (mm)	L (mm)
DH033	15,5	9,1	16,9	26,4	11,0	25,6
DH034	15,5	13,2	16,9	31,9	11,0	27,0
DH035	15,5	13,8	16,9	32,7	11,0	28,9
DH038	20,0	13,2	20,2	35,2	14,3	31,8
DH039	20,0	13,8	20,2	35,8	14,3	33,9




Fittings

Bulkhead connector



Ref	Description	Fam.	Subfam.		
DH052	BULKHEAD CONNECTOR 1/4" - 1/4"	30	175		
DH054	BULKHEAD CONNECTOR 3/8" - 3/8"	30	175		

Ref	T	B1 (mm)	B2 (mm)	H1 (mm)	H2 (mm)	L (mm)
DH052	M17	16,9	16,9	19	21	35,7
DH054	M24	20,2	20,2	24	25,5	42,4



Union elbow tube with stem

Ref	Description	Fam.	Subfam.		
DH063	UNION ELBOW TUBE WITH STEM 1/4" - 1/4"	30	175		
DH065	UNION ELBOW TUBE WITH STEM 3/8" - 3/8"	30	175		
DH067	UNION ELBOW TUBE WITH STEM 3/8" - 1/4"	30	175		

Ref	Ø P (mm)	A (mm)	B (mm)	E (mm)	L (mm)
DH063	15,5	21,0	16,9	34,8	25,1
DH065	20,0	24,8	20,2	43,2	31,4
DH067	17,6	22,5	17,5	38,3	27,7



Union connector

Ref	Description	Fam.	Subfam.		
DH073	UNION CONNECTOR 1/4" - 1/4"	30	175		
DH075	UNION CONNECTOR 3/8" - 3/8"	30	175		
DH079	UNION CONNECTOR 3/8" - 1/4"	30	175		

Ref	B1 (mm)	B2 (mm)	Ø E (mm)	L (mm)
DH073	16,9	16,9	15,5	36,2
DH075	20,2	20,2	20,0	42,9
DH079	20,2	16,9	20,0	42,1




Bulkhead flow regulators

Ref	Description	Fam.	Subfam.		
DH157	BULKHEAD FLOW REGULATOR WITH D=1/4"	30	175		
DH158	BULKHEAD FLOW REGULATOR WITH D=3/8"	30	175		

Ref	T	Ø P (mm)	A (mm)	B (mm)	E1 (mm)	E2 (mm)	H (mm)	L min (mm)	L max (mm)
DH157	M12	15,5	5,0	16,9	22,2	44,4	16	45,5	50,4
DH158	M15	20,0	6,0	19,8	26,1	52,1	19	52,7	58,4


Fittings

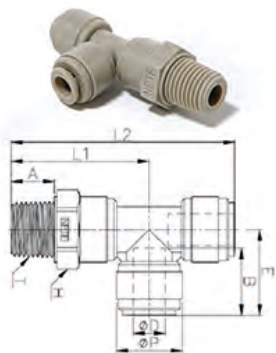

Male Swivel run tee NPT

Ref	Description	Fam.	Subfa m.		
DH122	MALE SWIVEL RUN TEE 1/4" NPT WITH D=1/4"	30	175		
DH124	MALE SWIVEL RUN TEE 3/8" NPT WITH D=3/8"	30	175		


Ref	ø P (mm)	A (mm)	B (mm)	E (mm)	H (mm)	L1 (mm)	L2 (mm)
DH122	15,5	13,2	16,9	21,0	17,46	36,9	57,9
DH124	20,0	13,0	20,2	25,9	21,4	41,8	67,7



Check valves

Ref	Description	Fam.	Subfam.		
DH131	CHECK VALVES 1/4"	30	175		
DH133	CHECK VALVES 3/8"	30	175		

Ref	Ø P (mm)	B (mm)	L (mm)
DH131	15,5	16,1	45,5
DH133	20,0	19,5	57,8

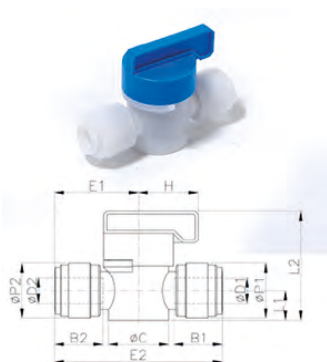

2 ways hand valves


Ref	Description	Fam.	Subfam.		
DH141	2 WAYS HAND VALVES 1/4"	30	175		
DH143	2 WAYS HAND VALVES 3/8"	30	175		

Ref	ø D1 Co nnection (inch)	ø D2 Co nnection (inch)	B1 (mm)	B2 (mm)	ø P1 (mm)	ø P2 (mm)	L1 (mm)	L2 (mm)	E (mm)	ø C (mm)
DH141	¼"	¼"	16,1	16,1	15,5	15,5	9,5	34,5	51,7	19,2
DH143	⅜"	⅜"	202	20,2	20,2	20,2	12,5	42,3	63,2	24,2



Fittings


Flow regulators

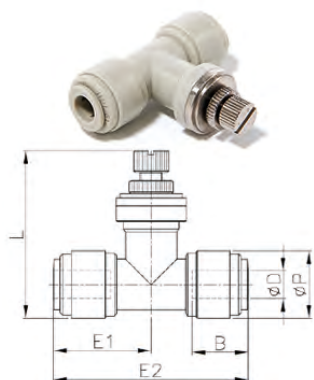

Ref	Description	Fam.	Subfam.		
DH167	FLOW REGULATOR WITH D=1/4"	30	175		
DH168	FLOW REGULATOR WITH D=3/8"	30	175		

Ref	ø P (mm)	B (mm)	L min (mm)	L max (mm)	E1 (mm)	E2 (mm)
DH167	15,5	16,9	45,5	42,7	22,2	44,4
DH168	20,0	19,8	57,8	49,7	26,1	52,1

Locking clips

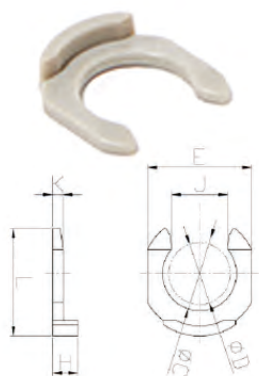

Ref	Description	Fam.	Subfam.		
DH193	LOCKING CLIPS FOR FITTINGS 1/4"	30	175		
DH195	LOCKING CLIPS FOR FITTINGS 3/8"	30	175		

Ref	ø D Connection (inch)	ø C (mm)	E (mm)	L (mm)	H (mm)	J (mm)	K (mm)
DH193	06 - 1/4"	8,0	11,6	11,6	3,1	6,4	1,3
DH195	10 - 3/8"	11,8	16,0	16,4	3,4	9,2	1,4

Male swivel tee NPTF



Ref	Description	Fam.	Subfam.		
DH112	MALE SWIVEL TEE 1/4" NPT WITH D=1/4"	30	175		
DH114	MALE SWIVEL TEE 3/8" NPT WITH D=3/8"	30	175		

Ref	ø P (mm)	A (mm)	B (mm)	E (mm)	H (mm)	L (mm)
DH112	15,5	13,2	16,9	21,0	17,46	36,9
DH114	20,0	13,0	20,2	25,9	21,4	41,8



PRF-RO Reverse Osmosis System

- Suitable for residential and commercial application use;
- Compact and reliable system that better suits the flow requirements of small and mid-sized businesses;
- No storage tank needed;
- Works with Line Pressure;
- No Pump or Electricity;
- Very easy installation with quick connections;
- Virtually Maintenance Free (change cartridges fast and easy);
- Consisting of Nr.1 Carbon Pre-Filter, Nr.2 R.O. Membrane Elements and Nr.1 Carbon Post-Filter.

Ref	Description	Fam.	Subfam.		
DE904	KIT R.O. PRF-RO SYSTEM P/N 4000462 WITH FAUCET	30	179		

Ref	P.N.	Description
DE904	4000462	KIT R.O. PRF-RO SYSTEM P/N 4000462 WITH FAUCET

OPERATING CONDITIONS	MINIMUM	MAXIMUM
Inlet Pressure	2,8 bar (40 psi)	5,5 bar (80 psi)
Inlet Temperature (°C)	4	38
Inlet TDS (mg/l)	50	2.000
Inlet Hardness (°F)	0	20
Inlet Chlorine (mg/l)	0	1,0
Inlet Iron (mg/l)	0	0,1
Inlet Manganese (mg/l)	0	0,05

Salt Rejection: Minimum 90%, Medium 93%.

TUBING/FITTING DIMENSIONS	
Inlet Tubing (natural tubing)	½"
Concentrate Tubing (black tubing)	¾"
Permeate Tubing (blue tubing)	¾"
Drain Tubing (red tubing) for airgap installation	½"
Drain connection	¾" o ½"
Carbon Post-Filter	¾" quick disconnect fittings

Filter/Membrane Performance Specifications:

Filter Type	Length (mm)	Diameter (mm)	Flow Rate (lpm)	Flow Rate (gpm)	Average Life (months)
Carbon Pre-Filter	432	74	14,20	3,75	6 (or 19.000 Liters)
RO Element	476	80	0,95	0,25	24 ÷ 48
Carbon Post-Filter	254	51	2,80	0,75	6 (or 19.000 Liters)

Box: WxLxH	Box: Q.ty	Box: Weight	Pallet: WxLxH	Pallet: Q.ty	Pallet: Weight

Certificates	Manufacturer	Sectors
	Pentair	Domestic, Industrial



PRF-RO Reverse Osmosis System

Spare parts of PRF-RO Reverse Osmosis System:

Ref	Description	Fam.	Subfam.		
DE920	MEMBRANE R.O. MERLIN P/N 4000569	30	179		
DE923	CARBON CARTRIDGE PRE FILTER P/N 3038333	30	179		
DE924	PRE FILTER CARTRIDGE SEDIMENT 10 MICRON P/N 1266690	30	179		
DE926	CARBON IN LINE POSTFILTER P/N 255526-09	30	179		
DE930	SUMP P/N 1239705	30	179		
DE932	SUMP O-RING P/N 1240326	30	179		
DE935	HEAD ASSEMBLY PRF-RO P/N 4000445	30	179		
DE937	SUPPORT SHOULDER PRF-RO P/N 3038021	30	179		
DE938	DRAIN FITTING KIT W/COLLARS P/N 1240564	30	179		
DE941	SAFETY PLATE FOR FITTING FIXING PRF-RO P/N 303802	30	179		
DE942	AIR-GAP FAUCET P/N 3020487	30	179		
DE945	CONNECTION FITTINGS KIT PRF-RO P/N 4000330	30	179		
DE946	CONNECTION TUBE KIT P/N 1255736	30	179		
DE954	CONCENTRATE ELBOWED FITTING 3/8" BLACK P/N 126446	30	179		
DE955	FEED ELBOWED FITTING 1/2" WHITE P/N 12400117	30	179		
DE956	PERMEATE ELBOWED FITTING 3/8" BLUE P/N 12400118	30	179		
DE961	RETRO FIT KIT PRF-RO P/N 4000454	30	179		

Ref	P.N.	Description
DE920	4000569	MEMBRANE R.O. MERLIN P/N 4000569
DE923	3038333	CARBON CARTRIDGE PRE FILTER P/N 3038333
DE924	1266690	PRE FILTER CARTRIDGE SEDIMENT 10 MICRON P/N 1266690
DE926	255526-09	CARBON IN LINE POSTFILTER P/N 255526-09
DE930	1239705	SUMP P/N 1239705
DE932	1240326	SUMP O-RING P/N 1240326
DE935	4000445	HEAD ASSEMBLY PRF-RO P/N 4000445
DE937	3038021	SUPPORT SHOULDER PRF-RO P/N 3038021
DE938	1240564	DRAIN FITTING KIT W/COLLARS P/N 1240564
DE941	3038026	SAFETY PLATE FOR FITTING FIXING PRF-RO P/N 303802
DE942	3020487	AIR-GAP FAUCET P/N 3020487
DE945	4000330	CONNECTION FITTINGS KIT PRF-RO P/N 4000330
DE946	1255736	CONNECTION TUBE KIT P/N 1255736
DE954	1264462	CONCENTRATE ELBOWED FITTING 3/8" BLACK P/N 126446
DE955	12400117	FEED ELBOWED FITTING 1/2" WHITE P/N 12400117
DE956	12400118	PERMEATE ELBOWED FITTING 3/8" BLUE P/N 12400118
DE961	4000454	RETRO FIT KIT PRF-RO P/N 4000454